


# DUAL LAUNCH & RECOVERY SYSTEM DATA SHEET




BEACON OFFSHORE LTD.

## DUAL BASKET LAUNCH AND RECOVERY SYSTEM (LARS)

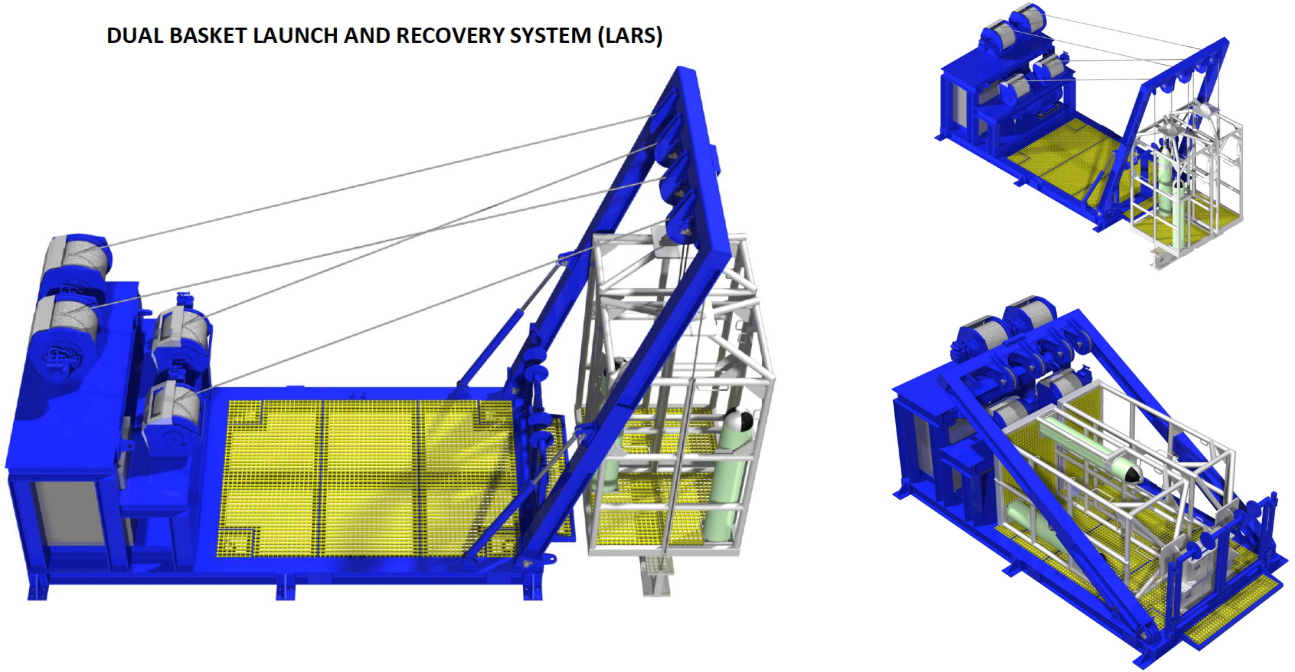

### DUAL LARS MAIN FEATURES

Two independent diver-baskets, each with on-board air supplies and each operated by individual main & back-up man-riding winches powered by 3 fully independent hydraulic power units. Mains & back-up power switchover device is also incorporated into the system for added safety. The whole unit folds into a very compact package to fit in a standard 20' shipping container for ease of transport.

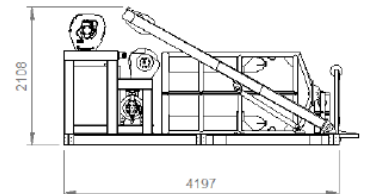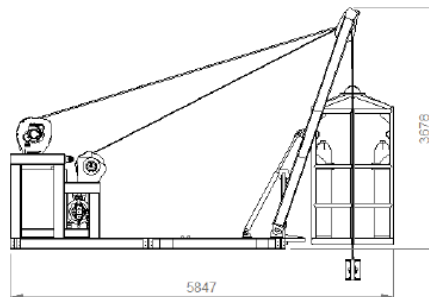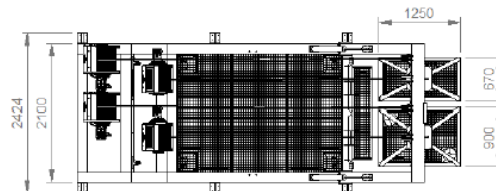

### Technical Specification

Depth Capability	: 75 mtrs
Design	: Lloyds Register Rules for Offshore lifting
Certification	: IMCA DO23 Design & IMCA DO18
Primary Basket / Cage Cylinders	: 2 x 50 Litre @ 300 Bar
Weight	: 6500kg
HPU Electrical Requirements	: 380-440 V 3PH 50/60 Hz
Oil Capacity	: 3 x 150 Litre (Triple Tank)
Main Lift Wire	: 13 mm dia Length 80 metres Anti Rotational
Clump Weight Wire	: 13 mm dia Length 160 metres Anti Rotational



Contact:

Stuart P. Walker

Office:

T: +66 38 348 080

F: +66 38 348 088

Mobile:

+66 81 940 1355

Email:

stuart.w@beacon-offshore.com

Registered Office:

Pinthong Industrial Estate

789/128 Moo 1

Nongkham, Sriracha

Cholburi 20230, Thailand